

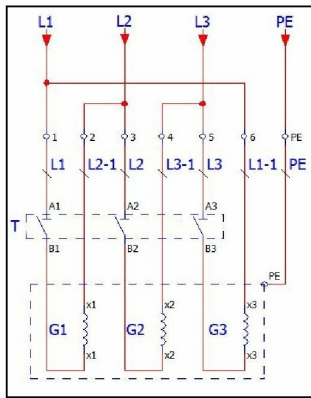
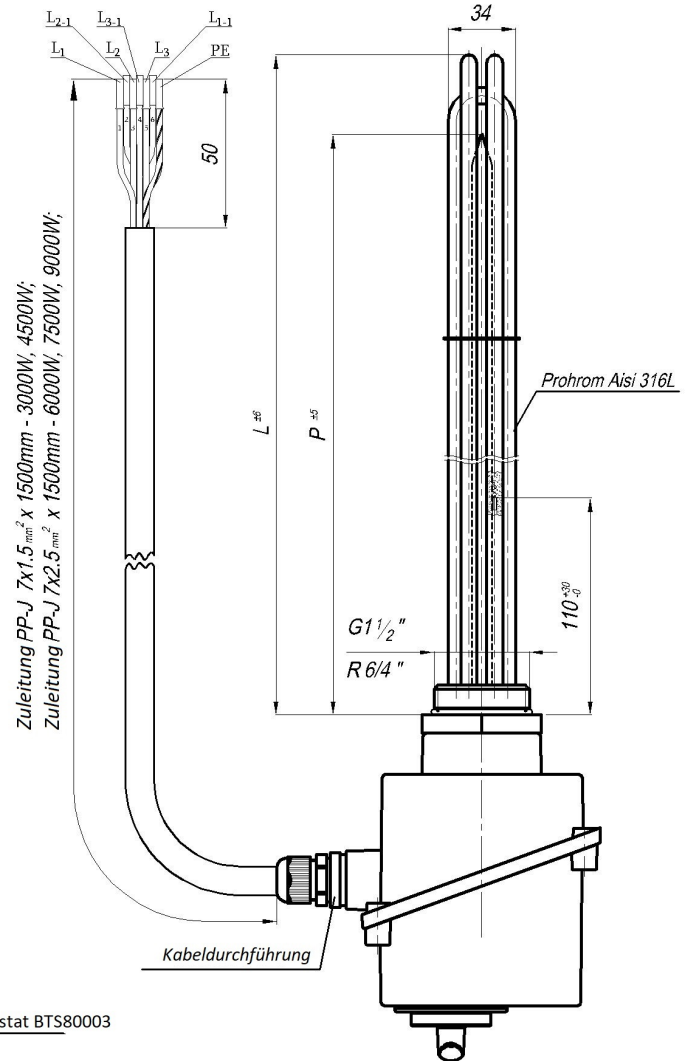


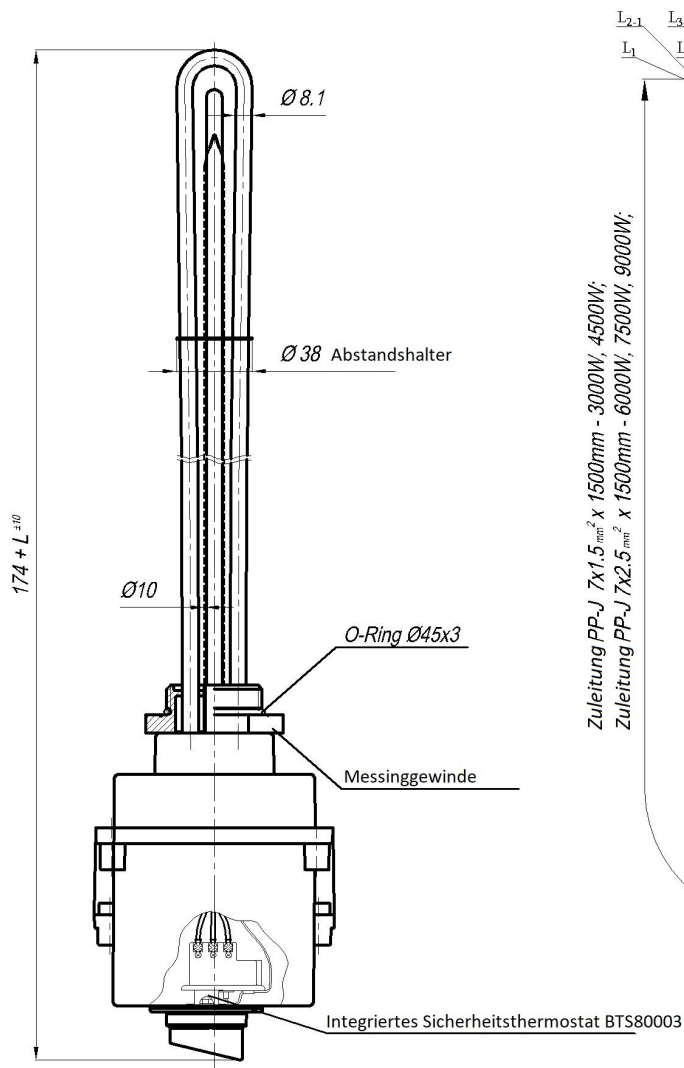

Schema Dreieckschaltung ~400V

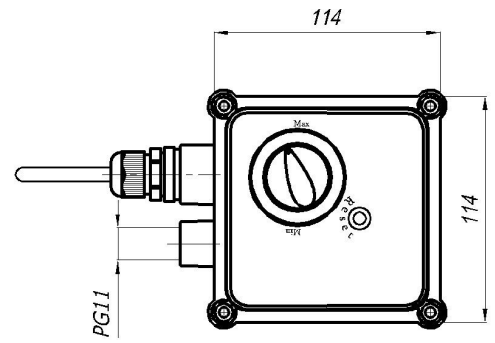

Art.Nr	Barcode	Leistung / Spannung	Länge	Abstandshalter	Zuleitung	Kabeldurchführung
BSP175	8606010477966	3000W / ~ 400V	L = 290 mm	1 pcs	7 x 1.5 x 1500 mm	PG 16
BSP176	8606010477973	4500W / ~ 400V	L = 405 mm	1 pcs	7 x 1.5 x 1500 mm	PG 16
BSP177	8606010477997	6000W / ~ 400V	L = 440 mm	1 pcs	7 x 2.5 x 1500 mm	M25 x 1.5
BSP178	8606010478321	6000W / ~ 400V	L = 505 mm	2 pcs	7 x 2.5 x 1500 mm	M25 x 1.5
BSP179	8606010478338	7500W / ~ 400V	L = 615 mm	2 pcs	7 x 2.5 x 1500 mm	M25 x 1.5
BSP180	8606010478345	9000W / ~ 400V	L = 615 mm	2 pcs	7 x 2.5 x 1500 mm	M25 x 1.5

Spannung :	$U = \sim 400 \text{ V}$	Name: Elektrisches Heizelement für Photovoltaik als
Leistung :	$P = 3000-9000 \text{ W}^{+5\%}_{-10\%}$	Warmwasserbereiter R6/4" AISI 316L Ø8,1 mm
Datum :	18 / 09 / 2023	L=290/405/440/505/615 mm ~400 V 3000/4500/6000/7500/9000 W
Artikel Nr.:	BSP175 - 180	mit Thermoregulierung und Reset-Taste
Barcode :	860601047XYZQ	